


Large Kid's Locker - Assembly Instructions - SKU: SL-1-151548

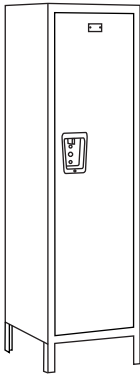


Assembly of Large Kid's Locker with Legs

All bolts are to be inserted on outside of locker while all nuts are to be fastened on the inside of the locker.


Step One:

Remove unassembled locker from shipping packing and identify all parts as shown below.

(1) Front Door - Frame

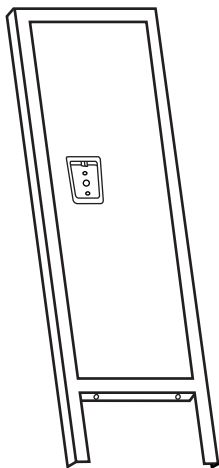


(1) Back Panel

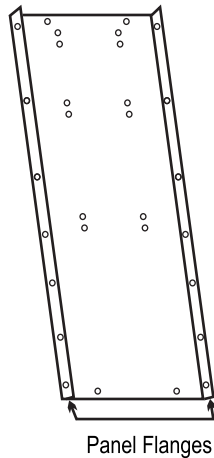


(2) Side Panels

Panels are identical for convenience

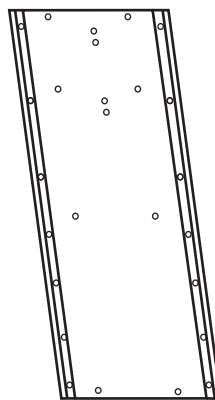


(1) Interior Shelf



(2) Top/Bottom Panels

Top/Bottom are identical for convenience



(2) Rear Legs

Legs are identical for convenience




Step Two:


- Place back panel on flat even floor or pair of saw horses.
- Lightly bolt left and right side panels to the inside of each back panel flange.



Bolt tamper-proof screws on the inside of the locker. Only the screw heads should show on the outside of the locker.




Top holes are 1/2" at the top of each panel shown.

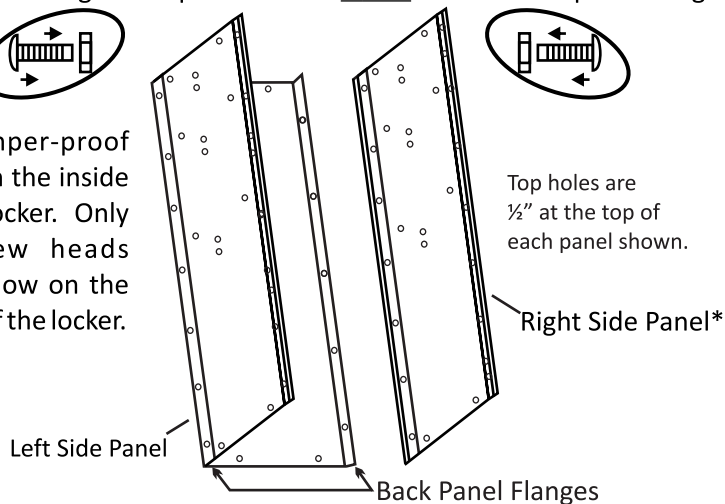

View of the locker with back panel on the floor or saw horses

Example:

Left and right side panels must go inside back panel flanges.

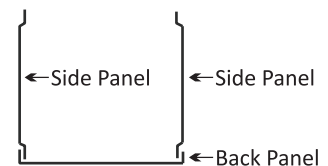

Jorgenson Lockers


A div. of Jorgenson Industrial Companies
STRONG on Customer Service

For missing parts, components or additional assistance please contact your customer service rep or call 800.952.0151

Large Kid's Locker - Assembly Instructions - SKU: SL-1-151548

Step Three

- Lightly bolt top panel, rear legs and then bottom panel inside both side panels and back panel*.
- Lightly bolt interior shelf inside both side panels and back panel.
- * Note: Both bottom and top panels are identical.

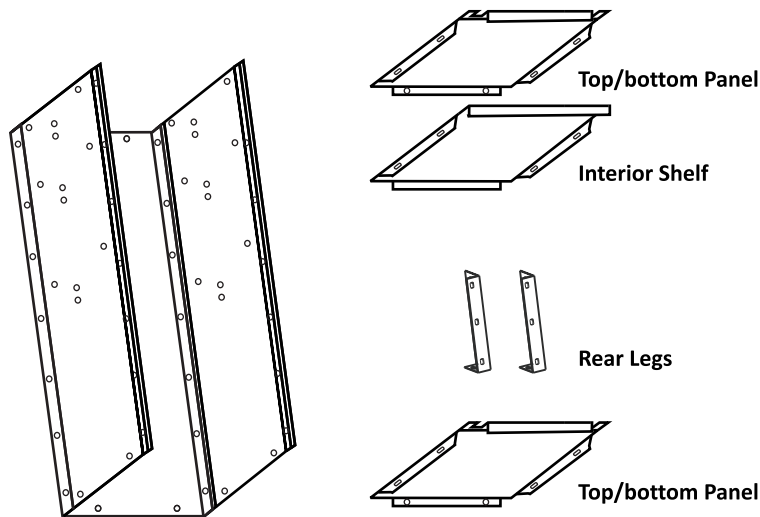

Note


Top and bottom panels have two (2) round pre-drilled holes located on the back flange intended to bolt to the back panel.

Interior shelf has oblong holes on the side of the flanges.

Assemble the interior shelf with the panel bottom lips facing the front opening of the locker.

Step Four

- Once the top/bottom panels have been assembled, insert front door frame on the outside of the left, right and bottom panels.
- Ensure that the lockers door opens properly. Adjusting bolts as needed will allow the door to open and close, if problems occur.
- If the door operate correctly, tighten all bolts.
- In the interest of safety, we highly recommend anchoring the locker to prevent injury or theft.

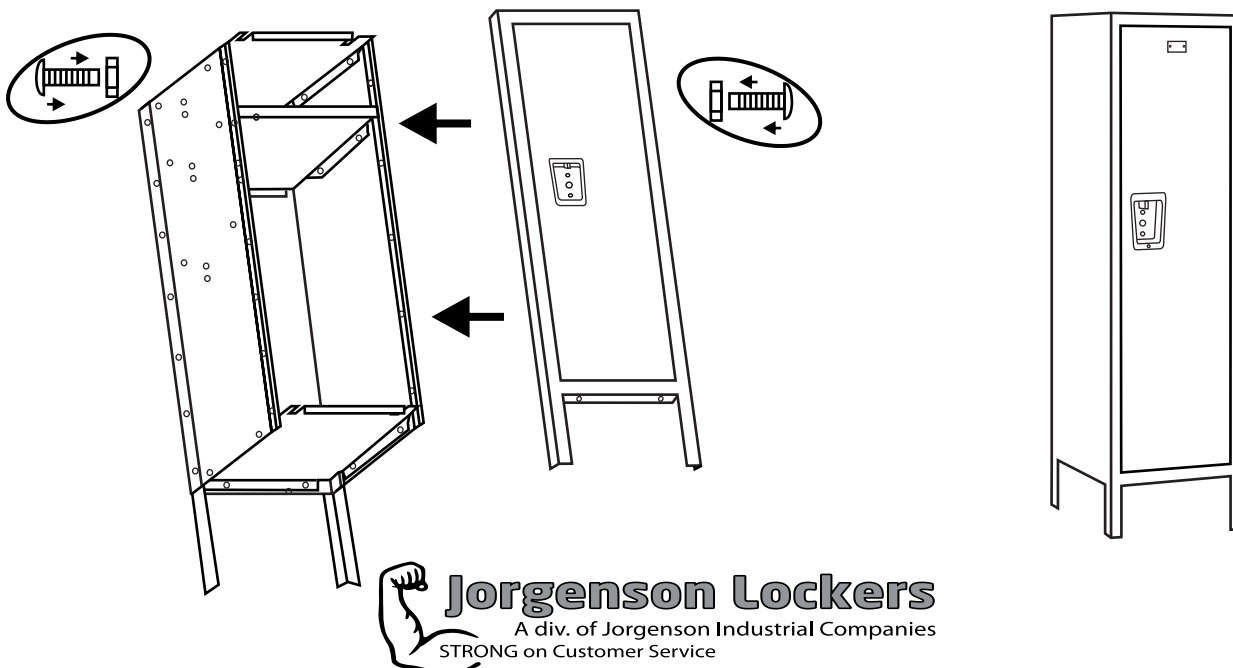

For missing parts, components or additional assistance please contact your customer service rep or call 800.952.0151